

# vegatronic 500



[www.ilapak.com](http://www.ilapak.com)



PACKAGING MACHINERY


TECHNICAL SPECIFICATIONS	S	P	SP
<b>Machine speed</b>	120 cpm	120 cpm	120 cpm
<b>Bag size</b>			
WIDTH MIN	50mm-2.0"	50mm-2.0"	50mm-2.0"
WIDTH MAX	270/280*mm-10.6/11.0"	260/270*mm-10.2/10.6"	Same as per S or P
LENGTH (greater length feasible on request)	330mm-13.0"	330mm-13.0"	330mm-13.0"
<b>Wrapping materials</b>	Heat sealable materials, such as polypropylene, barrier films, laminates, as well as polyethylene films.		
<b>Film reel dimensions</b>			
REEL WIDTH MAX	580mm-22.8"	580mm-22.8"	580mm-22.8"
REEL OUTER Ø MAX	400mm-15.7"	400mm-15.7"	400mm-15.7"
REEL CORE Ø MAX	76mm-3.0"	76mm-3.0"	76mm-3.0"
<b>Film reel max weight</b>	100kg-220lbs	100kg-220lbs	100kg-220lbs
<b>Sealing system</b>	Brushless motor driven horizontal sealing jaws-Pneumatic vertical seal bar		
	Standard heat-seal jaws and vertical seal bar	laseal sealing system	Both S & P system
<b>Electronic platform</b>	PLC Omron for USA & Canada, in particular Allen Bradley platform available		
<b>Program memory</b>	40 programs		
<b>HMI</b>	5" monocolour touch screen		
<b>Power req. (optional excluded)</b>	AC 400 V+/-5%, 3 phase, neutral, 50/60Hz, 3.3kW, 5A		
<b>Compressed air</b>	350-500NI/min, 7 bar-101.5 psi	500-900NI/min, 7 bar-101.5 psi	Same as per S or P
<b>Machine finish</b>	Electrostatic epoxy powder coating-Stainless steel version *		
<b>Machine handing</b>	Right hand version, left hand version *		
<b>Machine dimensions</b>	(Width x Depth x Height) 1206 x 1945 x 1375 mm - 47.5" x 76.5" x 42.9"		
<b>Machine weight</b>	Approx. 600kg – 1323lbs		

\* optional

MAIN FEATURES

- PLC-controlled machine with touch-screen display
- Multi-language interface
- Easily programmable 40 product recipes
- Digital speed display
- Integrated temperature control
- Machine diagnostics
- Access password
- Robust mechanical construction with small footprint
- Reduced product drop height
- Configuration for PE and heat-sealable films
- Servo-driven horizontal jaw carriage
- Quick bag size change-over
- Bag length electronically measured and adjustable
- No-fill-no-bag function
- Complete synchronization of ancillary equipment such as weigher, printer, labeller, dosers, etc.


PACK STYLES

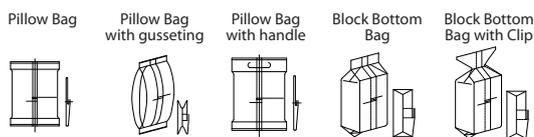

...and many more

Please discuss your needs with our local representative to configure these machines to your product's specific requirements.

ILAPAK is ISO 9001:2000 certified

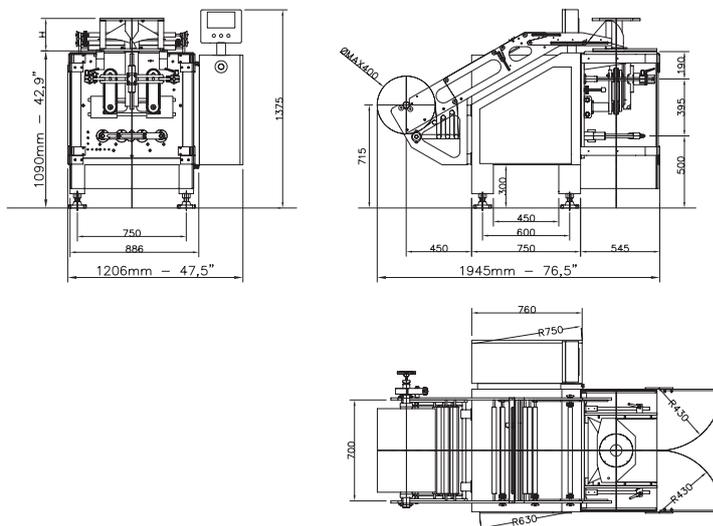

All measurements not specified in inches are given in millimeters.

These specifications are not binding. We reserve the right to change them without prior notice.